


Symbol



Filter

Features

1. Remove water and particle effectively.
2. Compact size with effective air service.
3. 40μm and 5μm filter element are easily interchangeable and replaceable.

How to order


F200A — 02	N	C	H	B	A	K	
Miniature Filter	Port size	Thread	Filtration	Drain	Mounting bracket	Bowl	Bowl guard
	01 : 1/8"(option) 02 : 1/4"	Blank :G N :NPT R :Rc	PE Blank :5μm C :40μm Sintered brass S :5μm T :40μm	Blank :Semi-auto drain H :Manual drain D :Auto drain	Blank :W/O bracket B :W/I bracket	Blank :Standard bowl A :Anti-acid & alkali bowl	Blank :W/O guard K :W/I guard




Specifications

Model	F200A-01	F200A-02
Port size	1/8" (option)	1/4"
Fluid	Compressed air	
Body material	Polycarbonate	
Bowl material	Polycarbonate (Standard)	
Filtration	PE: 5μm (Standard), 40μm (Option) Sintered brass (Option): 5μm, 40μm	
Operating pressure range	0.5 ~ 9.9 kgf/cm ²	
Proof pressure (Standard bowl)	12 kgf/cm ²	
Max. flow rate l/min (ANR) 40μm	1900	
Ambient temperature	-10℃ ~ 60℃	
Filter bowl capacity	35cc	
Standard drain	Semi-auto drain (Drains below 0.5kgf/cm ²)	
Net weight	245g	
Option	Mounting bracket set	

Dimensions

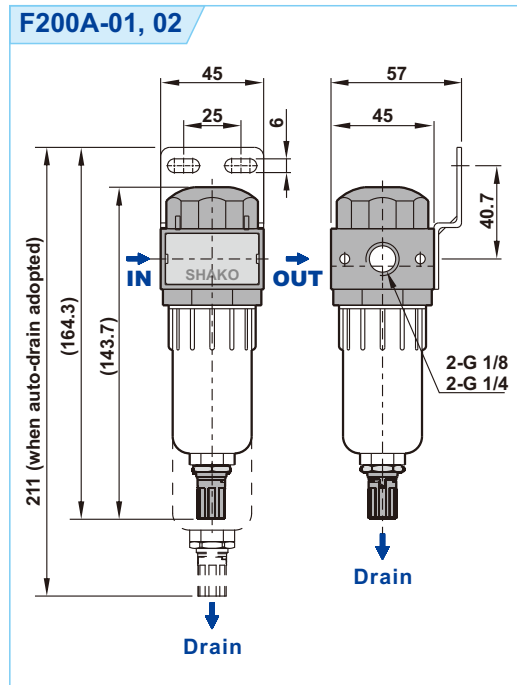

Flow chart



Note:

X axis: Flow (l/min)
Y axis: Pressure (kgf/cm²)
Blue line (P0) = Outlet pressure
Black line (P1) = Inlet pressure
P1-P0=Pressure range