


Symbol



Features

- 1. Lubricator oil can be replenished without stopping air supply.
- 2. Oil spray in mist ensures good lubrication for machines.

How to order


NUL	02	N	A
Lubricator	Port size	Thread	Bowl
	02 : 1/4"	Blank : G	Blank : Standard bowl
	03 : 3/8"	N : NPT	A : Anti-acid & alkali bowl
	04 : 1/2"	R : Rc	AL : Aluminum bowl

*Lubricator oil (Recommended): ISO-VG32


Specifications

Model	NUL-02	NUL-03	NUL-04
Port size	1/4"	3/8"	1/2"
Fluid	Compressed air		
Body material	Aluminum die-cast		
Bowl material	Polycarbonate (Standard), Anti-acid & alkali bowl (Option), Aluminum bowl (Option)		
Operating pressure range	0.5 ~ 9.9 kgf/cm ²		
Proof pressure (Standard bowl)	15 kgf/cm ²		
Max. flow rate l/min (ANR)	2080	2100	2600
Ambient temperature	-10℃ ~ 60℃		
Lubricator bowl capacity	125cc		
Net weight	550g (W/I Aluminum bowl, 720g)		
Accessories	Mounting nut set		

Dimensions

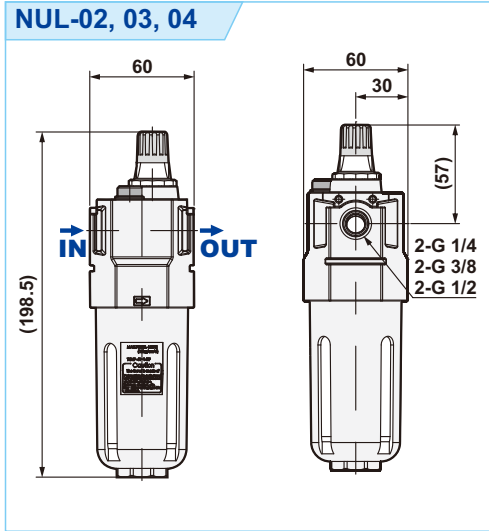

Flow chart

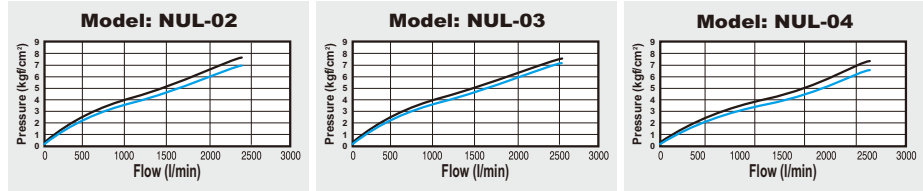

Note:

X axis: Flow (l/min)
Y axis: Pressure (kgf/cm²)
Blue line (P0) = Outlet pressure
Black line (P1) = Inlet pressure
P1-P0= Pressure range

Memo...

