


■ Symbol



■ Features

- 1. Lubricator oil can be replenished without stopping air supply.
- 2. Oil spray in mist ensures good lubrication for machines.



*Lubricator oil (Recommended): ISO-VG32

■ How to order


UCL	–	02	N	B	A
Lubricator		Port size	Thread	Mounting	Bowl
		02 : 1/4"	Blank : G	Blank : W/O bracket	Blank : Standard bowl
		03 : 3/8"	N : NPT	B : W/I bracket	A : Anti-acid & alkali bowl
		04 : 1/2"	R : Rc		AL : Aluminum bowl

■ Specifications


Model	UCL-02	UCL-03	UCL-04
Port size	1/4"	3/8"	1/2"
Fluid	Compressed air		
Body material	Aluminum die-cast		
Bowl material	Polycarbonate (Standard), Anti-acid & alkali bowl (Option), Aluminum bowl (Option)		
Operating pressure range	0.5 ~ 9.9 kgf/cm ²		
Proof pressure (Standard bowl)	15 kgf/cm ²		
Max. flow rate l/min (ANR)	2080	2100	2600
Ambient temperature	-10℃ ~ 60℃		
Lubricator bowl capacity	125cc		
Net weight	550g (Al bowl 850g)		
Option	Mounting bracket set		

■ Dimensions

UCL-02, 03, 04

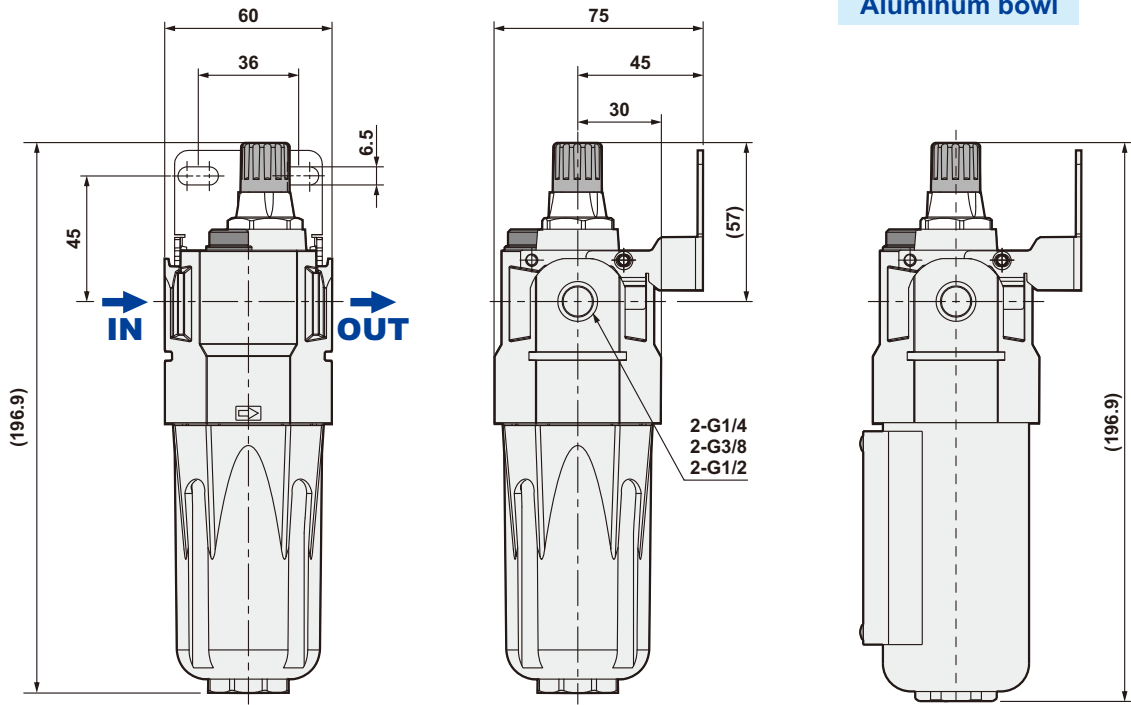

■ Flow chart

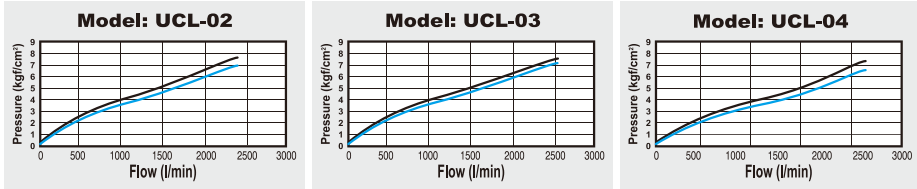

Note:
X axis: Flow (l/min)
Y axis: Pressure (kgf/cm²)
Blue line (P0) = Outlet pressure
Black line (P1) = Inlet pressure
P1-P0= Pressure range