SHAKO

Q Series

Quick Exhaust Valve

Symbol



Features

1. Increase piston speed instantly.
2. The valve is able to install on cylinder ports.

How to order

Q –	01	N
Quick Exhaust Valve	Port size	Thread
	01: 1/8" **04**: 1/2" **02**: 1/4" **06**: 3/4" **03**: 3/8"	**Blank**: G **N** : NPT **R** : Rc

Specifications

Model	Q-01	Q-02	Q-03	Q-04	Q-06
Port size	1/8"	1/4"	3/8"	1/2"	3/4"
Body material	Aluminum alloy				
Fluid	Compressed air				
Sectional area	16mm²	27mm²	28mm²	71mm²	72.5mm²
Operating pressure range	0.5 ~ 9.9 kgf/cm²				
Proof pressure	10 kgf/cm²				
Max.flow rate (l/min)	886	1823	2300	3000	3848
Ambient temperature	-10℃ ~ 80℃				

Dimensions

Q-01~06

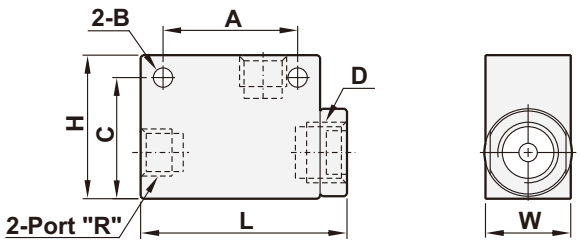

Model	R	L	W	H	A	B	C	D
Q-01	1/8"	46	19	32	30	ϕ4.3	27	G 1/4
Q-02	1/4"	61.5	25.4	38	39	ϕ5.6	31.5	G 3/8
Q-03	3/8"	61.5	25.4	38	39	ϕ5.6	31.5	G 3/8
Q-04	1/2"	98	38	63.7	60	ϕ8.5	50.5	G 3/4
Q-06	3/4"	98	38	63.7	60	ϕ8.5	50.5	G 3/4