




Features

1. Suitable for flammable working environments.
2. The valve is actuated by air for accurate response.

How to order

SA520	X	—	01	N	S
520 : 5/2 Way	Acting style		Port size	Thread	Pneumatic control
530 : 5/3 Way	Blank: Standard		01 : 1/8"	Blank : G	S: Single pneumatic
	5/3 Way			N : NPT	D: Double pneumatic
	Blank: Closed center			R : Rc	
	X: Exhaust center				
	Y: Pressurized center				

Dimensions

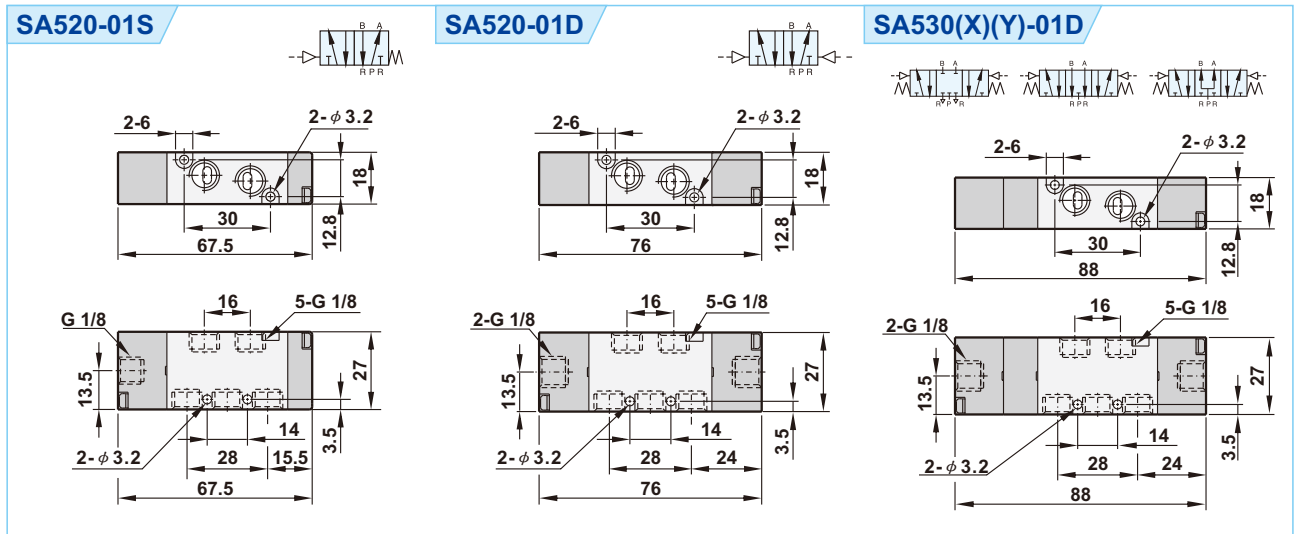

Specifications

Model	SA520-01S	SA520-01D	SA530-01D
Port size	1/8"		
Body material	Aluminum alloy		
Effective area	11mm ²		9mm ²
Fluid	Compressed air		
Acting	External pilot (1.5 ~ 7 kgf/cm ²)		
Operating pressure range	0 ~ 8 kgf/cm ²		
Proof pressure	9.9 kgf/cm ²		
Ambient temperature	-10°C ~ 60°C		
Net weight	70g	75g	110g

Flow chart

