

Features

1. Suitable for flammable working environments.
2. The valve is actuated by air for accurate response.
3. The mounting position is identical to the counter product from the famous Japanese brand.




How to order

SB520	X	-	02	N	S
520 : 5/2 Way	Acting style		Port size	Thread	Pneumatic control
530 : 5/3 Way	Blank : Standard		02 : 1/4"	Blank : G	S : Single pneumatic
	5/3 Way			N : NPT	D : Double pneumatic
	Blank : Closed center			R : Rc	
	X : Exhaust center				
	Y : Pressurized center				

**5/3 way valve is only available for double pneumatic control.

Dimensions

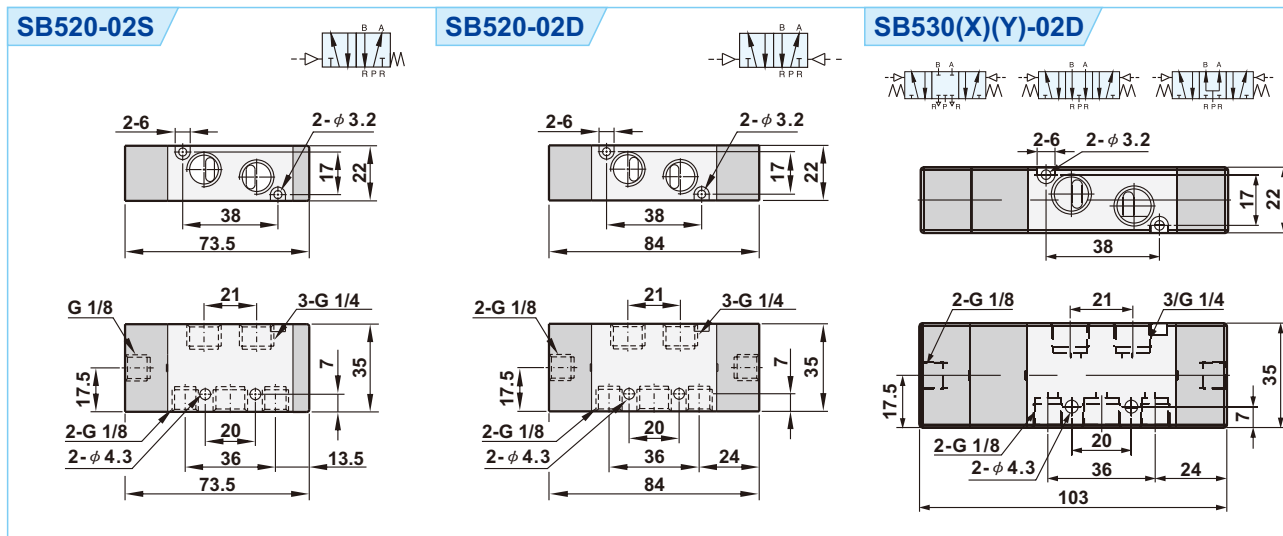

Specifications

Model	SB520-02S	SB520-02D	SB530-02D
Port size		1/4"	
Body material	Aluminum alloy		
Effective area		18mm ²	14mm ²
Fluid	Compressed air		
Acting	External pilot (1.5 ~ 7 kgf/cm ²)		
Operating pressure range	0 ~ 8 kgf/cm ²	0 ~ 7 kgf/cm ²	
Proof pressure	9.9 kgf/cm ²		
Ambient temperature	-10°C ~ 60°C		
Net weight	135g	145g	220g

Flow chart

