

Features


1. Medium size, 30mm width, large flow rate.
2. Lockable manual override for easy operation.
3. Stainless steel body with special process in manufacturing and strick quality control ensure long life of the product.
4. Coil nut is available.



How to order

SCY520 – 02	N	–	S	2	L	E1
5/2 Way	Port size	Thread	Solenoid	Voltage	Led	Coil type
	02 : 1/4" 03 : 3/8"	Blank : G N : NPT R : Rc	S : Single solenoid D : Double solenoid	1 : 110VAC 2 : 220VAC 6 : 24VAC 7 : 12VDC 9 : 24VDC	Blank : W/O LED L : W/I LED	Blank : DIN L : Lead wire E1 : EX-proof 22mm width E2 : EX-proof 30mm width E3 : EX-proof CSA standard

Dimensions

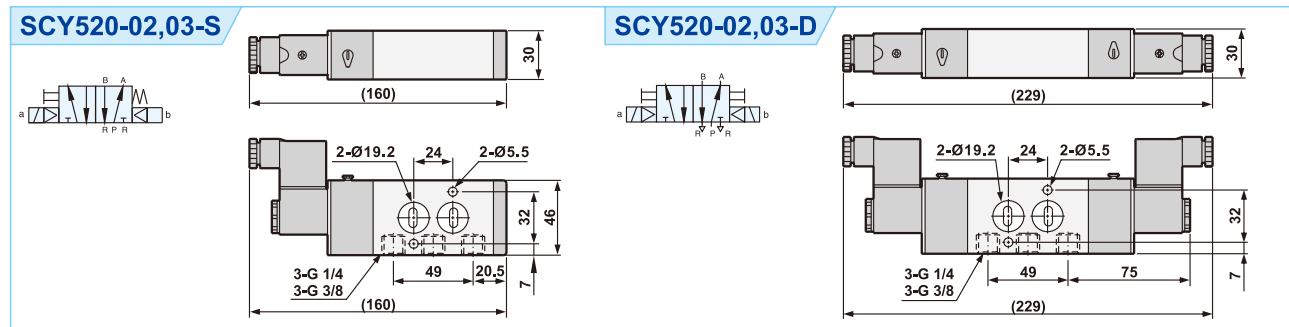

Specifications

Model	SCY520-02-S	SCY520-02-D	SCY520-03-S	SCY520-03-D
Port size	1/4"		3/8"	
Body material	SUS316			
Fluid	Compressed air			
Effective area	35mm ²			
Acting	Internal pilot			
Operating pressure range	1.5 ~ 8 kgf/cm ²			
Proof pressure	9.9 kgf/cm ²			
Ambient temperature	-10℃ ~ 60℃			
Duty cycle	100% ED			
Coil type	DIN (Standard)			
Protection class	IP65 (DIN 40 050)			
Insulation class	F			
Voltage tolerance	±10%			
Standard Voltage	220VAC, 110VAC, 24VDC (The other voltage is optional)			

Flow chart

