

Features

1. Suitable for flammable working environments.
2. The valve is actuated by air for accurate response.




How to order


SY520	-	02	N	S
5/2 Way	Port size	Thread	Pneumatic control	
	02 : 1/4"	Blank : G	S : Single pneumatic	
	03 : 3/8"	N : NPT	D : Double pneumatic	
		R : Rc		

Dimensions

SY520-(02,03)-S

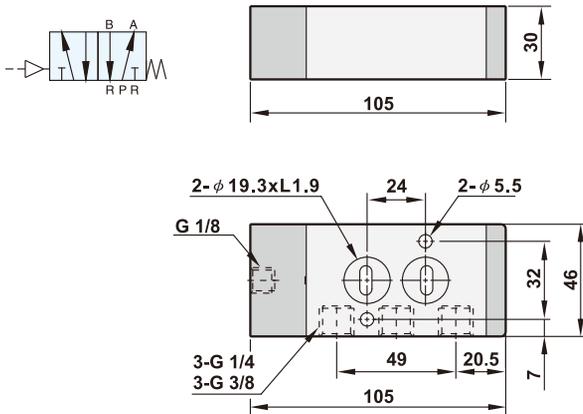

SY520-(02,03)-D

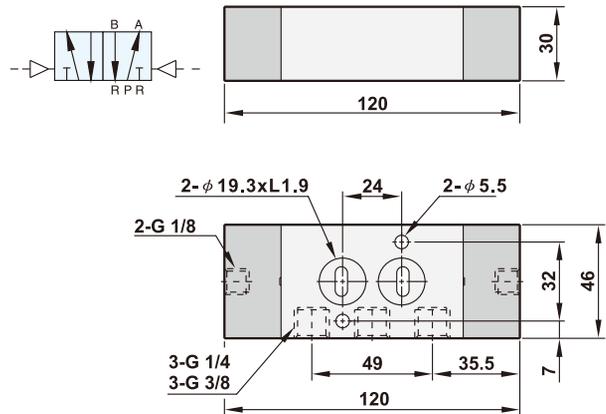

Specifications

Model	SY520-02-S(D)	SY520-03-S(D)
Port size	1/4"	
Body material	Aluminum alloy	
Fluid	Compressed air	
Effective area	35mm ²	
Acting	External pilot (2 ~ 8 kgf/cm ²)	
Operating pressure range	0 ~ 8 kgf/cm ²	
Proof pressure	9.9 kgf/cm ²	
Ambient temperature	-10°C ~ 60°C	
Net weight	305g	390g

Flow chart

