

■ Features

1. Quick acting agile response.
2. Plug connector (with LED) for electrical connection, Nonpolarity design efficiently reduce possibility of short circuit.
3. Low power consumption 1.3W.



■ How to order

VM5252	01	N	S	9
5/2 Way	Port size	Thread	Solenoid	Voltage
	01: 1/8"	Blank : G N : NPT R : Rc	S : Single solenoid D : Double solenoid	7: 12VDC 9: 24VDC

■ How to order manifold


VM5252M	01	N	02
	Port size	Thread	Stations
	01: 1/8" (A & B Ports)	Blank : G N : NPT R : Rc	02 : 2 Stations 03 : 3 Stations XX: XX Stations

■ Specifications


Model	VM5252-01-S	VM5252-01-D
Port size	1/8"	
Body material	Aluminum alloy	
Fluid	Compressed air	
Effective area	8.8mm ²	
Acting	Internal pilot	
Operating pressure range	1.5 ~ 7 kgf/cm ²	1 ~ 7 kgf/cm ²
Cycle rate	5Hz	
Proof pressure	8.0 kgf/cm ²	
Ambient temperature	-10°C ~ 50°C	
Duty cycle	100% ED	
Coil type	Plug connector	
Protection class	Dust proof	
Installation	Free direction	
Voltage tolerance	±10%	
Standard voltage (power)	12VDC, 24VDC	
Net weight	72g	93g

■ Dimensions


VM5252-01-S

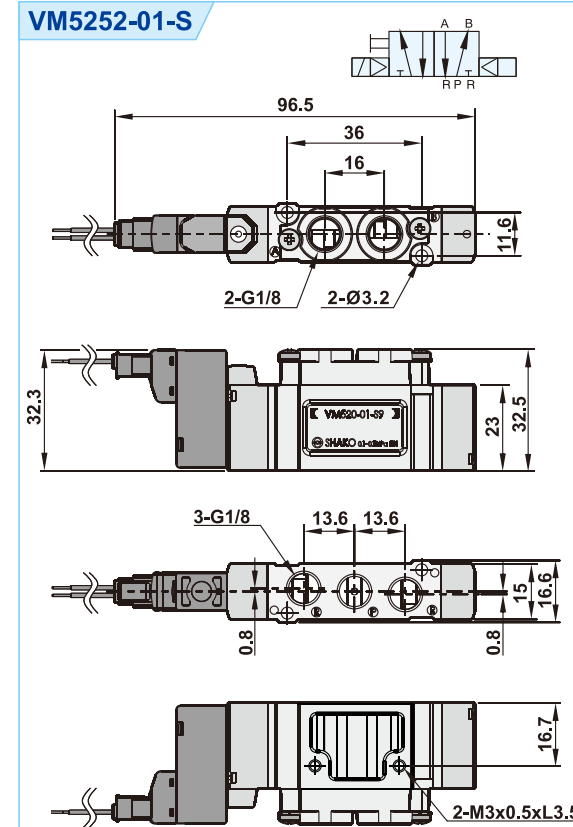

VM5252-01-D

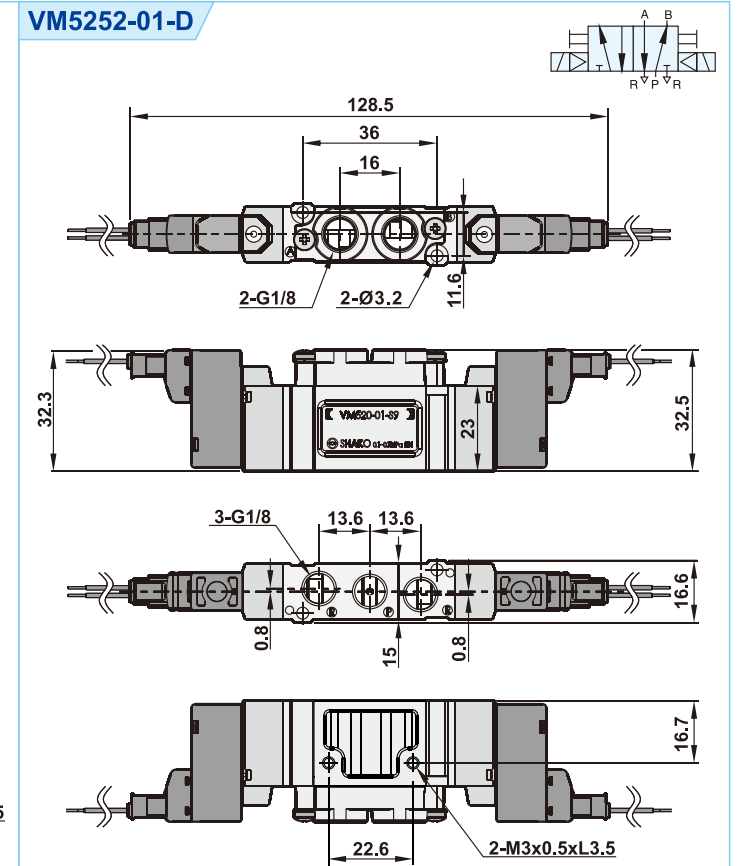

VM5252M-0102

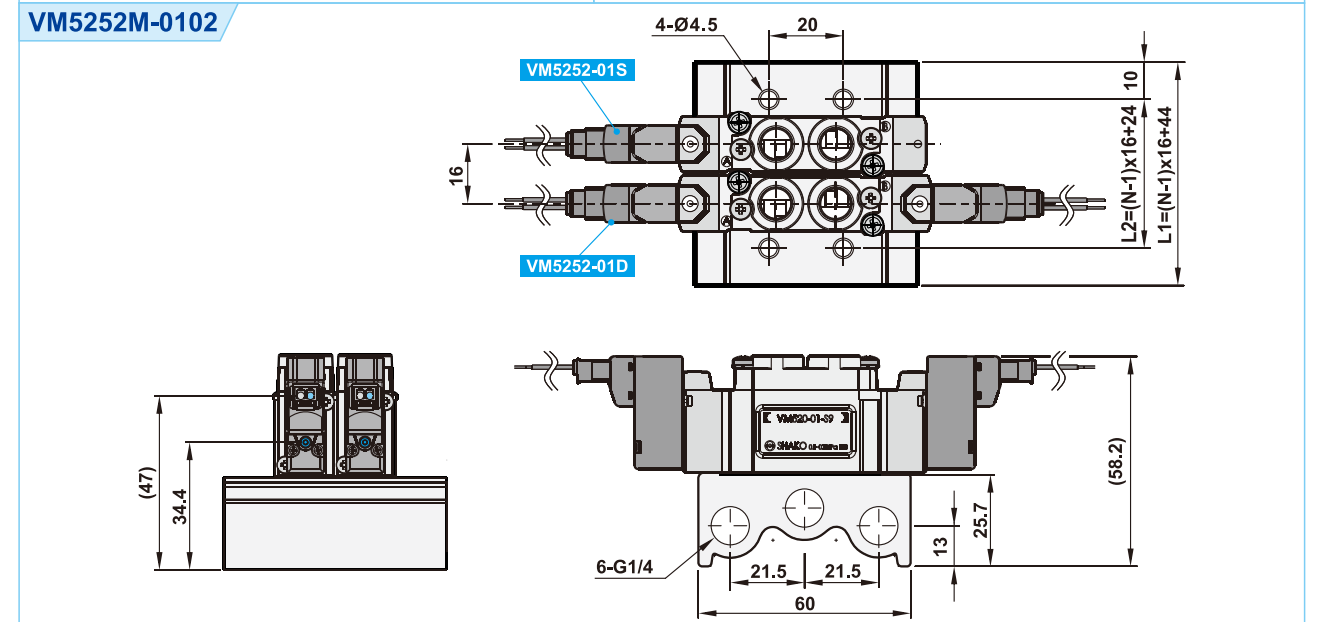

Number of station(N)	2	3	4	5	6	7	8	9	10
L1	60	76	92	108	124	140	156	172	188
L2	40	56	72	88	104	120	136	152	168