

■ Features

- 1.Quick acting agile response.
- 2.Plug with standard JPC design (with LED).
Nonpolarity design efficiently reduce possibility of short circuit.
- 3.Low power consumption 1.3W.



■ How to order

VM5252 – 01	N	S	9
5/2 Way	Port size	Thread	Solenoid
	01 : 1/8"	Blank : G N : NPT R : Rc	S : Single solenoid D : Double solenoid
			Voltage
			7 : 12VDC 9 : 24VDC


■ How to order manifold

VM5252M – 01	N	02
Port size	Thread	Stations
01 : 1/8" (A & B Ports)	Blank : G N : NPT R : Rc	02 : 2 Stations 03 : 3 Stations XX : XX Stations


■ Specifications

Model	VM5252-01-S	VM5252-01-D
Port size	1/8"	
Body material	Aluminum alloy	
Fluid	Compressed air	
Effective area	8.8mm ²	
Acting	Internal pilot	
Operating pressure range	1.5 ~7 kgf/cm ²	1 ~7 kgf/cm ²
Cycle rate	5Hz	
Proof pressure	8.0 kgf/cm ²	
Ambient temperature	-10℃ ~ 50℃	
Duty cycle	100% ED	
Electrical connection	JPC plug connector	
Protection class	Dust proof	
Installation	Free direction	
Voltage tolerance	±10%	
Standard voltage (power)	12VDC, 24VDC	
Net weight	72g	93g


■ Dimensions

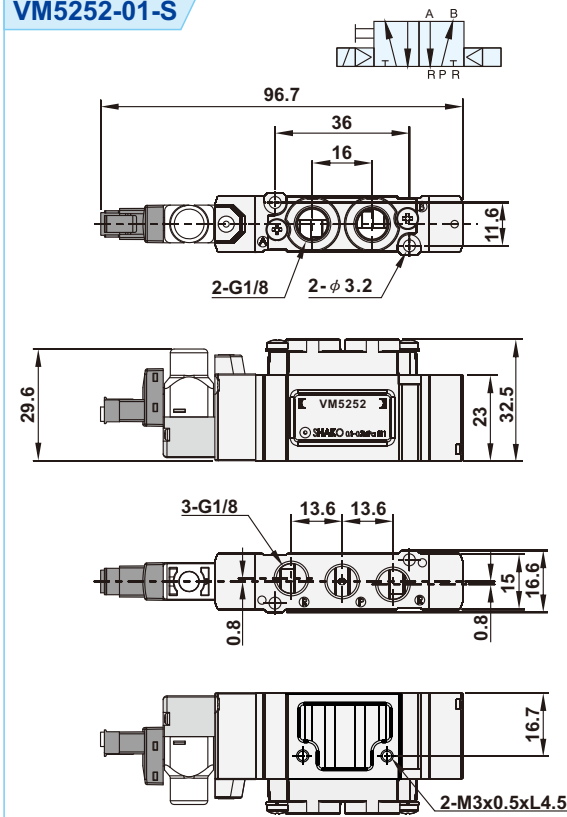VM5252-01-S

VM5252-01-D

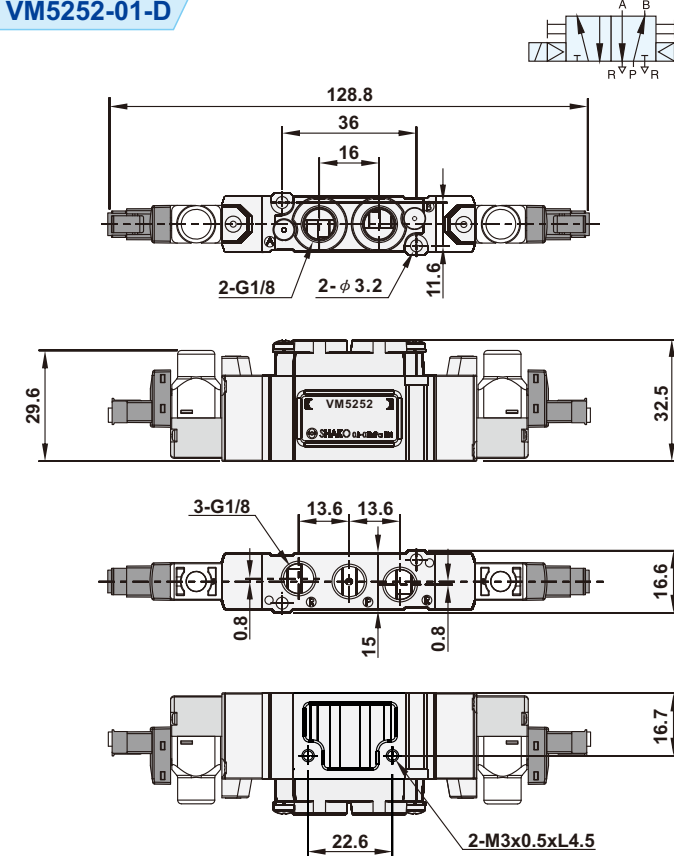

VM5252M-0102

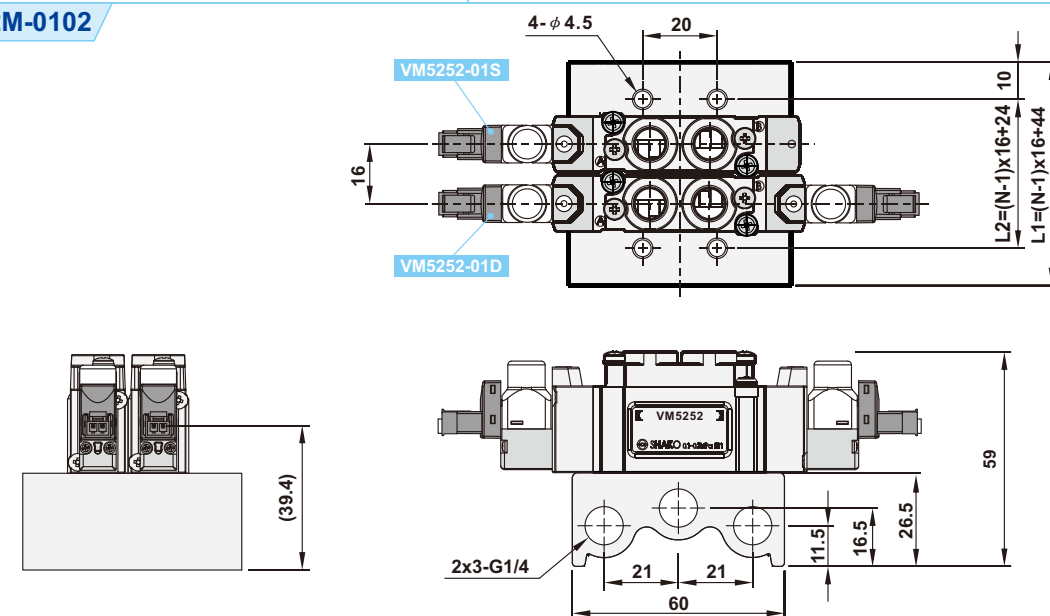

Number of station (N)	2	3	4	5	6	7	8	9	10
L1	60	76	92	108	124	140	156	172	188
L2	40	56	72	88	104	120	136	152	168