


Features

1. Miniature size, short length, efficiently reduce installation space.
2. Full thread design on cylinder body, suitable for panel mounting and plug mounting.

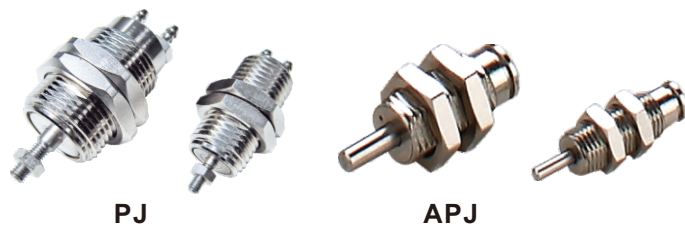


How to order

PJ	B	10	B05
PIN cylinder	Mounting	Bore size	Stroke
PJ : Double acting	Blank : Panel mounting	6 : $\phi 6$	5mm
APJ : Single acting-Spring return	B : Plug mounting	10 : $\phi 10$	10mm
			15mm

*PJ is with panel mounting type only

When plug mounting

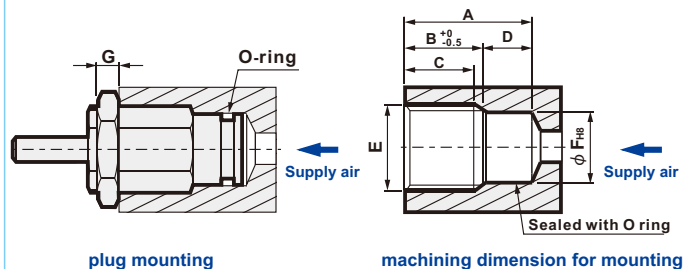



Bore size	code Stroke	A	B	C	D	E	F	G
$\phi 6$	5	16	12.5	10				
	10	23	19.5	17	3.5	M10x1.0	8.5	3
	15	30	26.5	24				
$\phi 10$	5	17	13.5	10.5				
	10	23.5	20	17	3.5	M15x1.5	12	4
	15	30.5	27	24				

Specifications




Bore size	φ 6		φ 10	
Acting	Double acting	Single acting	Double acting	Single acting
Port size	Barb fitting 4x2.5	M5		
Fluid	Compressed air			
Cushion	None			
Operating pressure range	1.5 ~ 7 kgf/cm ²	2 ~ 7 kgf/cm ²	1.5 ~ 7 kgf/cm ²	
Proof pressure	9.5 kgf/cm ²			
Body material	Bronze alloy			
Magnet	W/O magnet			
Ambient temperature	-5℃ ~ 60℃			
Piston speed	50~500mm/Sec			

Dimensions

PJ06, 10

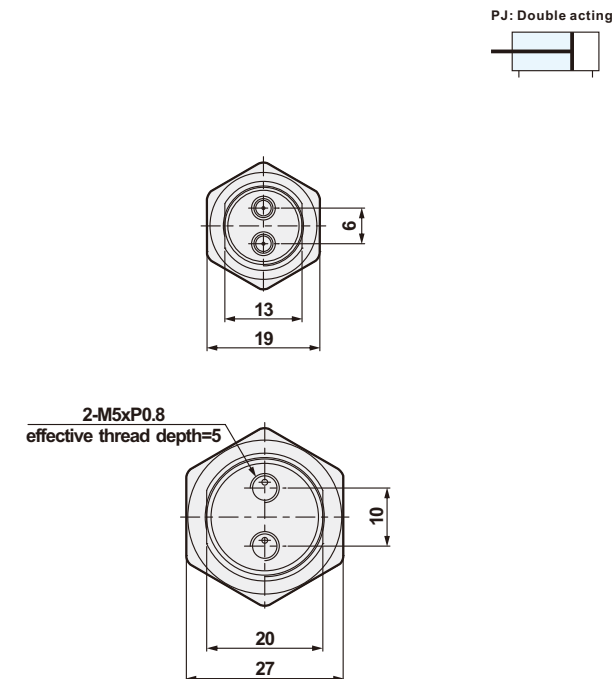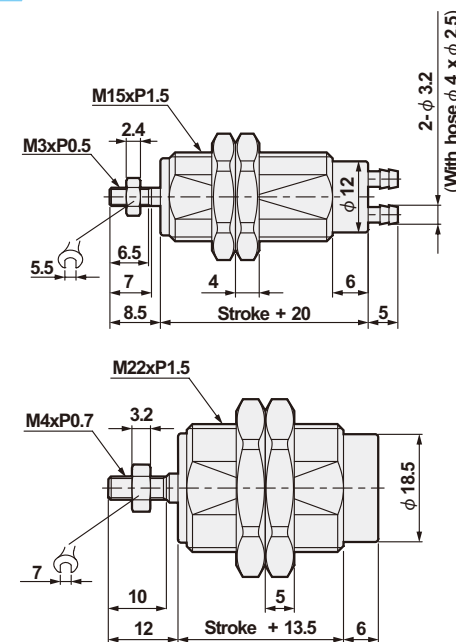

APJ06, 10

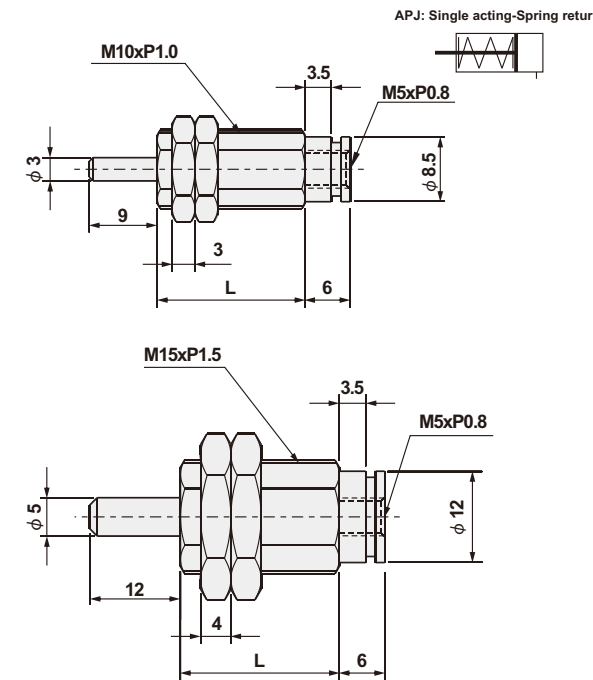

Model	$\phi 6$			$\phi 10$		
Stroke	5	10	15	5	10	15
L	12.5	19.5	26.5	14.5	21	28