

■ Features

1. Identical to ISO6430 standard.
2. High quality of aluminum tube provides a long service life.
3. High quality of seals ensures leakage free.
4. Various sensors for option.
5. With adjustable cushions on both ends.



■ How to order

STC	32	B	50	SF	D	1	FA	Y	S
Type	Bore size	Magnet	Stroke	Sensor	Type	Number of sensor	Mounting parts	Rod end joint	Rod material
STC:ISO6430 standard type	32:Ø32	B:W/I magnet		Blank:W/O sensor	Blank:Reed switch	1 pc	Blank:W/O mounting parts	Blank:W/O rod end joint	Blank:S45C
STCD:Double piston rod type	40:Ø40	C:W/O magnet		SF:LED in front	D:NPN	2 pcs	FA:Front flange	Y:Double knuckle joint	S:SUS304
STCA:Stroke adjustable 25mm	50:Ø50				E:PNP		FB:Rear flange	I:Single knuckle joint	
STCB:Stroke adjustable 50mm	63:Ø63						TC:Central trunnion	P:Eyebolt floating joint	
	80:Ø80						CA:Male clevis	T:Basic floating joint	
	100:Ø100						CB:Female clevis	L:Axial foot type floating joint	
							LB:Foot mounting	F:Flange type floating joint	

*Sensor please refer to P3-189~P3-190
*Repair kit to P3-33

■ How to order mounting parts

ZT	FA	—	32
STC series	Mounting parts		Bore size
	FA:Front flange		32:Ø32
	FB:Rear flange		40:Ø40
	TC:Central trunnion		50:Ø50
	CA:Male clevis		63:Ø63
	CB:Female clevis		80:Ø80
	LB:Foot mounting		100:Ø100

*Please refer to P3-38~P3-39

■ How to order rod end joints

ZNF	Y	—	M10
	Rod end joint		Thread size
	Y:Double knuckle joint		M10:M10xP1.25 (STC32)
	I:Single knuckle joint		M12:M12xP1.25 (STC40)
	P:Eyebolt floating joint		M16:M16xP1.5 (STC50, 63)
	T:Basic floating joint		M20:M20xP1.5 (STC80, 100)
	L:Axial foot type floating joint		
	F:Flange type floating joint		


*Please refer to P3-187~P3-188

■ Specifications

Bore size	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
Port size	1/8"	1/4"		3/8"		1/2"
Fluid	Compressed air					
Acting	Double acting					
Operating pressure range	1.5 ~ 9.5 kgf/cm ²					
Barrel material	Aluminum alloy					
Cushion	Built in					
Magnet	Option					
Ambient temperature	-5°C ~ 60°C					
Piston speed	50 ~ 700mm/Sec.					

■ Dimensions

ISO6430 Standard type

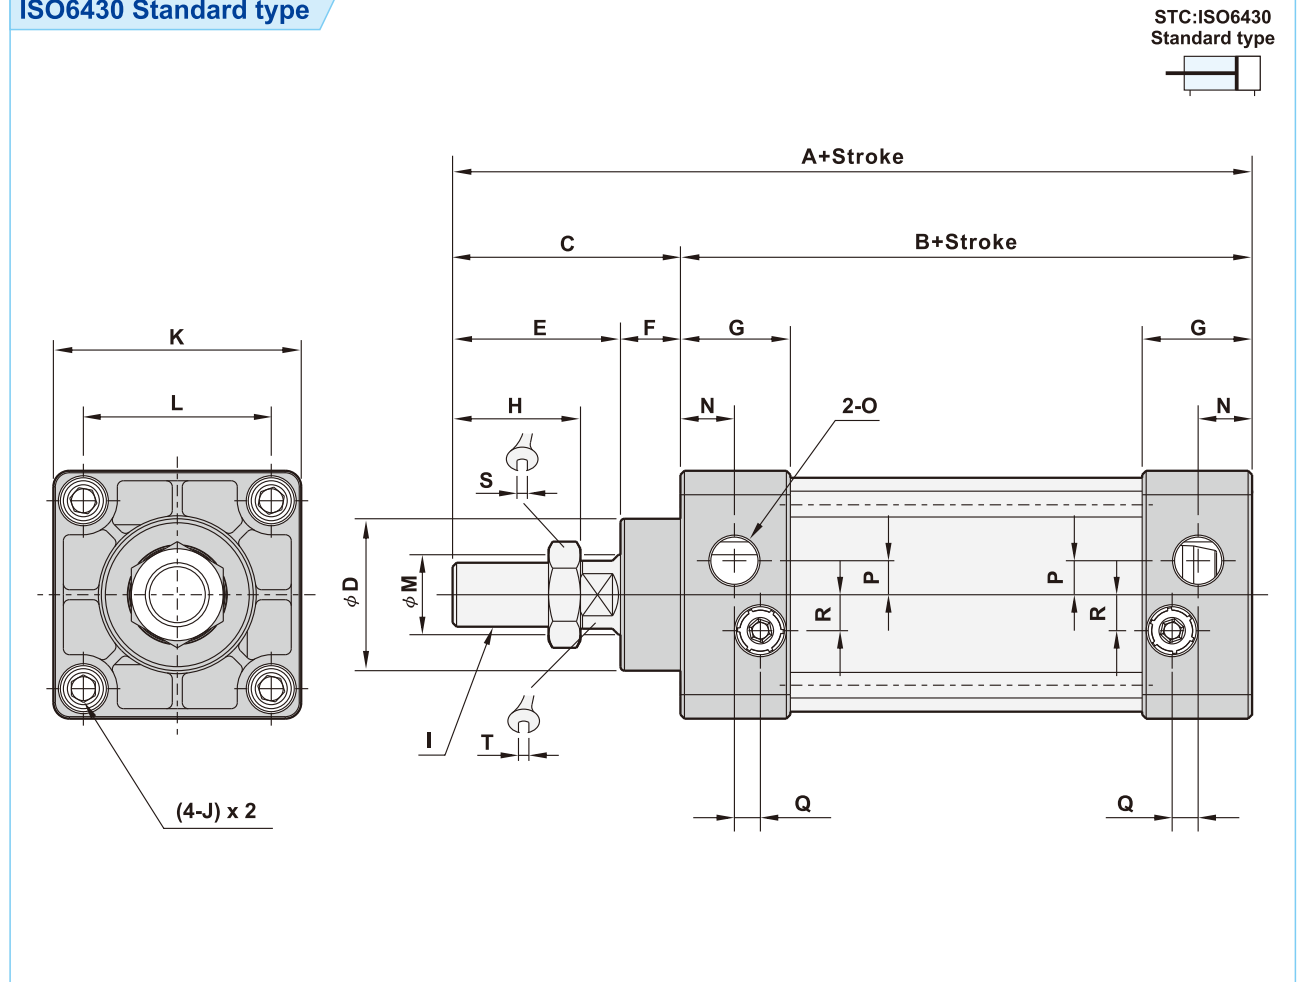


(Unit: mm)										
Bore size	A	B	C	D	E	F	G	H	I	J
φ 32	140	93	47	φ 28	32	15	27.5	22	M10xP1.25	M6xP1.0
φ 40	142	93	49	φ 32	34	15	27.5	24	M12xP1.25	M6xP1.0
φ 50	150	93	57	φ 34	42	15	27.5	32	M16xP1.5	M6xP1.0
φ 63	153	96	57	φ 34	42	15	29	32	M16xP1.5	M8xP1.25
φ 80	183	108	75	φ 47	54	21	33	40	M20xP1.5	M10xP1.5
φ 100	189	114	75	φ 47	54	21	33	40	M20xP1.5	M10xP1.5


Bore size	K	L	M	N	O	P	Q	R	S	T
φ 32	45	33	φ 12	13.75	G 1/8	3.5	6.5	7	17	10
φ 40	50	37	φ 16	13.5	G 1/4	6	6	7	19	13
φ 50	62	47	φ 20	13.5	G 1/4	8.5	5.5	9	24	17
φ 63	75	56	φ 20	14.5	G 3/8	8.5	5.5	9	24	17
φ 80	94	70	φ 25	16.5	G 3/8	10	7.5	14	26	22
φ 100	112	84	φ 25	16.5	G 1/2	11	7.5	14	26	22

■ Dimensions

STCD Double piston rod type

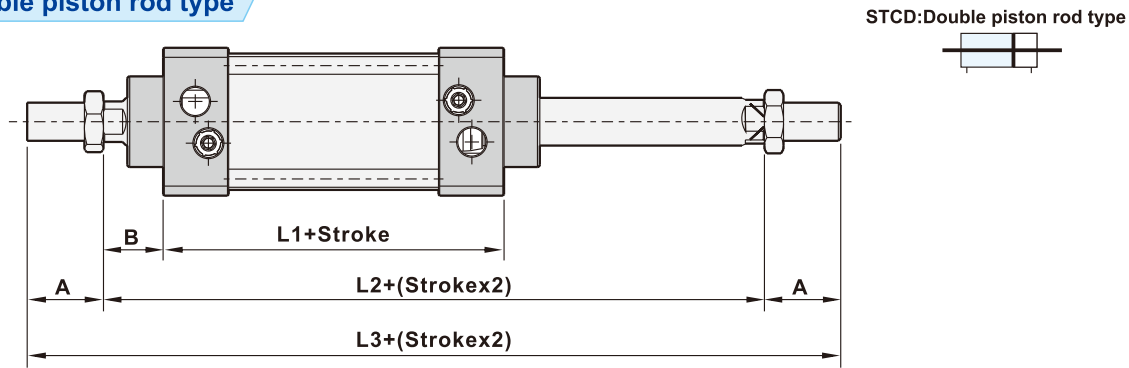

STCA, STCB Adjustable type

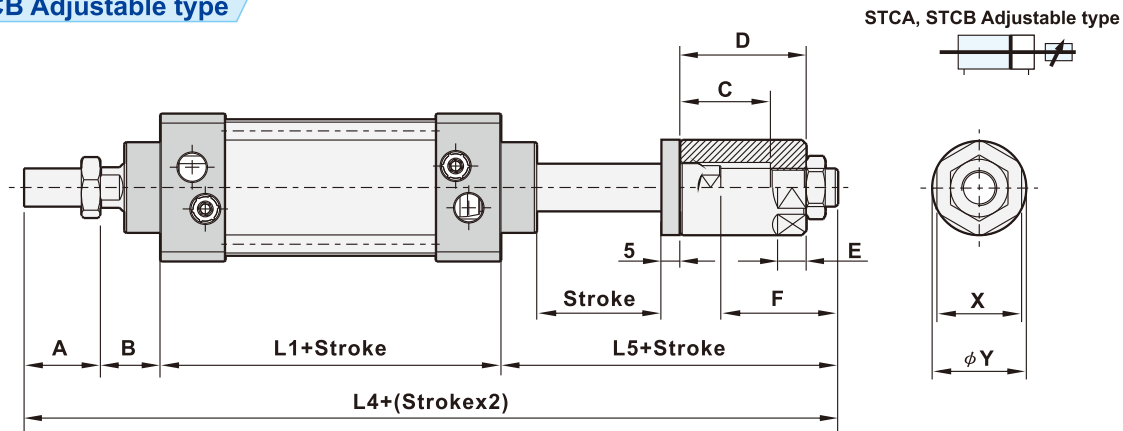


(Unit: mm)

Bore size	A	B	C		D		E	F	
			STCA	STCB	STCA	STCB		STCA	STCB
φ 32	22	25	35	62	47	72	10	49	74
φ 40	24	25	37	62	47	72	10	50	75
φ 50	32	25	38	63	53	78	12	57	82
φ 63	32	25	38	63	53	78	12	57	82
φ 80	40	35	40	65	60	85	12	62	87
φ 100	40	35	40	65	60	85	12	62	88

Bore size	L1	L2	L3	L4		L5		X	Y
				STCA	STCB	STCA	STCB		
φ 32	93	143	187	214	239	74	99	22	φ 25
φ 40	93	143	191	217	242	75	100	27	φ 30
φ 50	93	143	207	232	257	82	107	36	φ 40
φ 63	96	146	210	235	260	82	107	36	φ 40
φ 80	108	178	258	280	305	97	122	36	φ 40
φ 100	114	184	264	286	312	97	123	36	φ 40

■ Dimension of mounting parts


LB Foot mounting

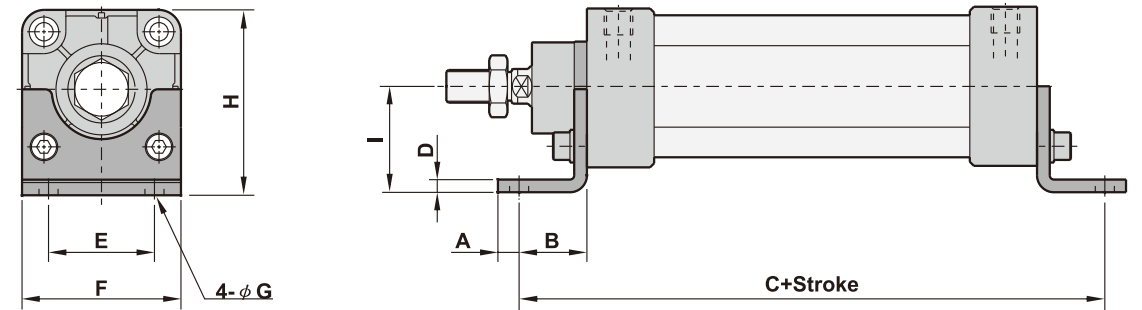

(Unit: mm)

Bore size	A	B	C	D	E	F	G	H	I
φ 32	9.5	20.5	134	3	33	50	φ 9	50.5	28
φ 40	14.5	23.5	140	3	37	57	φ 12	55	30
φ 50	12	28	149	3	47	68	φ 12	67.5	36.5
φ 63	13	31	158	3	56	80	φ 12	78.5	41
φ 80	16	30	168	4	70	97	φ 14	96	49
φ 100	18	30	174	4	84	112	φ 14	113	57

CA, CB Male & Female clevis

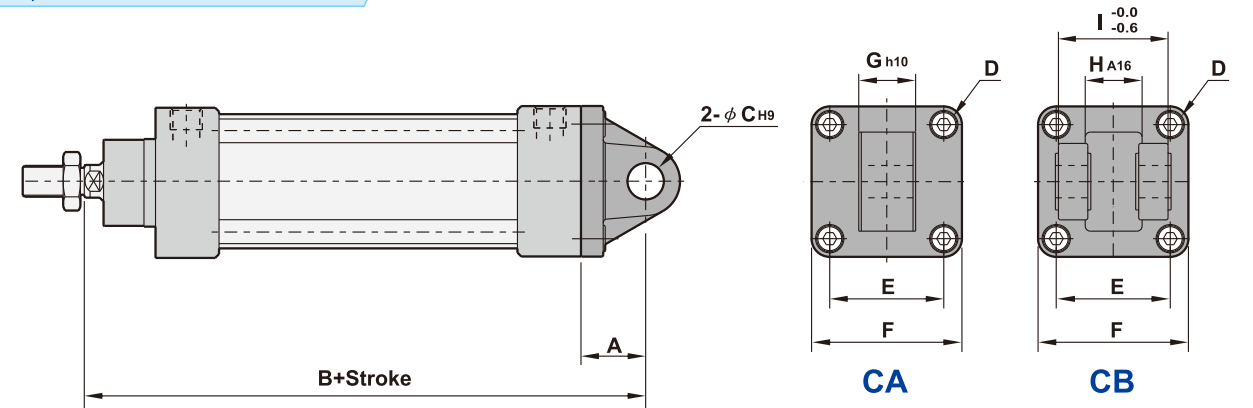


(Unit: mm)

Bore size	A		B		C	D	E	F	G	H	I
	CA	CB	CA	CB							
φ 32	34	19	152	137	φ 12	M6XP1.0	33	48	16	16.3	32
φ 40	34	19	152	137	φ 14	M6XP1.0	37	50	20	20.3	44
φ 50	34	19	152	137	φ 14	M6XP1.0	47	62	20	20.3	52
φ 63	34	19	155	140	φ 14	M8XP1.25	56	75	20	20.3	52
φ 80	48	32	191	175	φ 20	M10XP1.5	70	94	32	32.3	64
φ 100	48	32	197	181	φ 20	M10XP1.5	84	112	32	32.3	64

■ Dimension of mounting parts


FA, FB Front & Rear flange

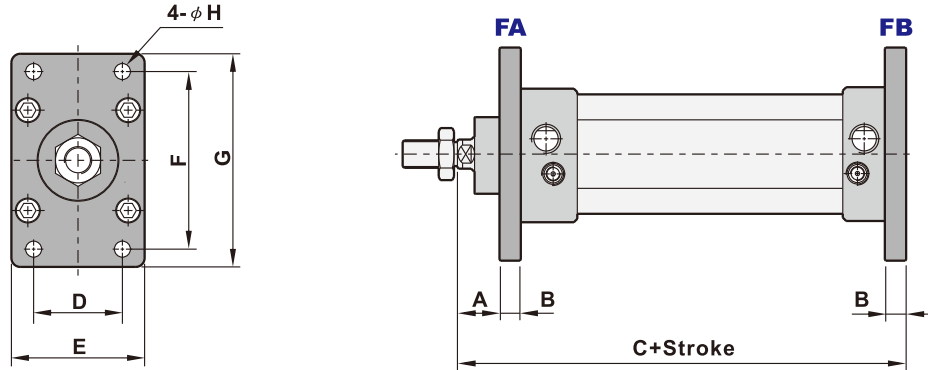

(Unit: mm)

Bore size	A	B	C	D	E	F	G	H
φ 32	15	10	128	33	47	58	72	φ 7
φ 40	15	10	128	36	52	70	84	φ 7
φ 50	15	10	128	47	65	86	104	φ 9
φ 63	13	12	133	56	76	98	116	φ 9
φ 80	19	16	159	70	95	119	143	φ 12
φ 100	19	16	165	84	115	138	162	φ 12

TC Central trunnion

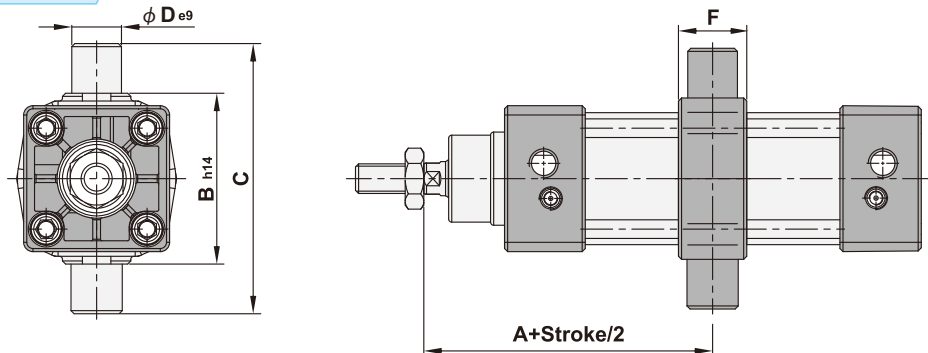


(Please contact your sales the change of position for TC central trunnion).

(Unit: mm)

Bore size	A	B	C	D	F
φ 32	71.5	55	87	φ 16	22
φ 40	71.5	63	113	φ 25	28
φ 50	71.5	76	126	φ 25	28
φ 63	73	88	138	φ 25	30
φ 80	89	114	164	φ 25	32
φ 100	92	132	182	φ 25	38

■ Material of parts

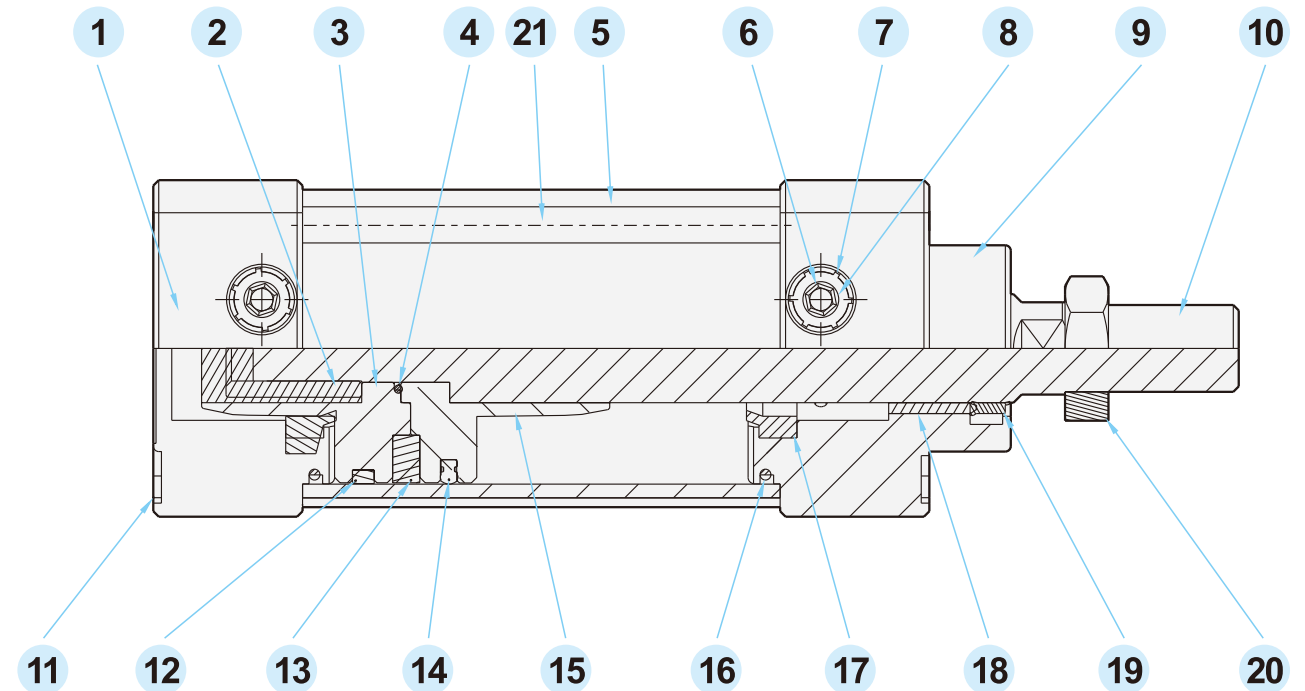

No.	Description	Material	Qty.	No.	Description	Material	Qty.
1	Rear cover	Aluminum alloy	1	12	Wear ring	Teflon+Graphite	1
2	Piston mounting nut	Brass+Ni	1	13	Magnet	Rubber	1
3	Rear piston	Aluminum alloy	1	14	U-Piston seal	NBR	1
4	O-ring	NBR	1	15	Front piston	Aluminum alloy	1
5	Barrel	Aluminum alloy	1	16	O-ring	NBR	2
6	Cushion needle	Brass	2	17	Cushion	PU	2
7	Push on fastener	FeC	2	18	Bushing	Brass	1
8	O-ring	NBR	2	19	Rod seal	PU	1
9	Front cover	Aluminum alloy	1	20	Nut	Fe+Ni	1
10	Piston rod	S45C+Cr	1	21	Tie-Rod	S45C+Zn	4
11	Fixing bolt	Fe+Ni	8				

■ Stroke table

Bore size	Acting	Standard stroke(mm)	Max. Standard stroke(mm)
φ 32 ~ φ 100	Double acting	25 ~ 1500	2200

Note: Please contact our sales for non-standard stroke.