

Features

- 1. Direct acting and quick response.
- 2. Suitable for acid & alkali chemical fluid.
- 3. Fluid must be liquid.
- 4. Horizontal installation.
- 5. Anti-backflow
- 6. Can be used with PU320.



How to order

PEC22	03	N
Teflon Direct acting Pneumatic control	Port size	Thread
	03 :3/8"	Blank :G
	04 :1/2"	N:NPT
	06 :3/4"	R:Rc
	08 :1"	

How to order Repair kit

ZGPEC22 — 03


Repair kit	Port size	Description	Qty.
	03 :3/8", 1/2"	Gasket	1
	06 :3/4", 1"	Diaphragm	1

Specifications

Model	PEC22-03	PEC22-04	PEC22-06	PEC22-08
Port size	3/8"	1/2"	3/4"	1"
Fluid	Pure water, Acid & Alkali chemical liquid			
Orifice	Ø8mm		Ø12mm	
Acting	Direct acting			
Acting style	Normally closed			
Diaphragm	NBR coated with PTFE in bottom			
Fluid pressure range	-98pa ~ 5.0 kgf/cm²			
Cylinder operating pressure range	1.5 ~ 9.0 kgf/cm²			
Valve body material	Teflon			
Cylinder port size	1/8		1/4	
Max. secondary pressure	3.0 kgf/cm²			
Ambient temperature	-10°C ~ 60°C			
Installation	Horizontal			
Cylinder body material	Aluminum alloy			
Net weight	491g		1320g	

Dimensions

PEC220-03,04

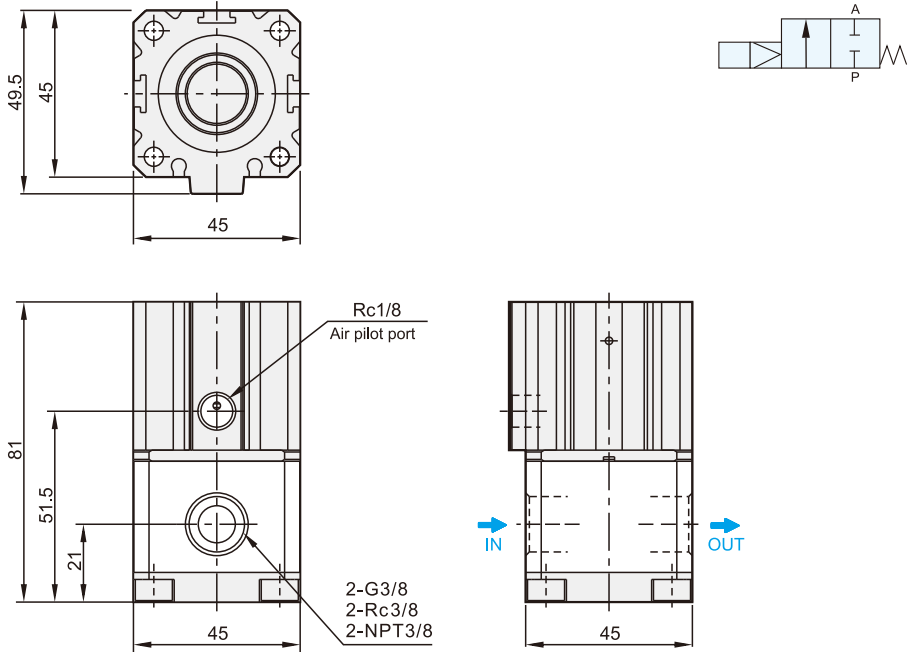

PEC220-06,08

