

■ Features

1. Power consumption reduced by 75%.
2. Effectively reduce the temperature rise of the coil and improve the service life of the solenoid valve.
3. 3/2 way solenoid valve. The valve is easy to be stacked.
4. To stack the valve, assembly kit is necessary.
5. Assembly kit includes O-ring x 1, bolt x 2, screw x 2, nut x 2.



■ How to order


E-PU320	N	M02	—	O2	N	—	S7	—	L
3/2 Way	Acting style	Number of stack		Port size	Thread		Voltage		Led
	Blank: Normally closed N: Normally open	Blank: W/O Stack M02: 2 Valves stack M03: 3 Valves stack Mxx: xx Valves stack		01: 1/8" 02: 1/4"	Blank: G N: NPT R: Rc		S7: 12VDC S9: 24VDC		L: W/ LED

■ Specifications


Model	E-PU320(N)-01-S	E-PU320(N)-02-S
Port size	1/8"	1/4"
Body material	Aluminum alloy	
Effective area	1.5mm ²	
Fluid	Compressed air	
Acting	Direct acting with spring return	
Operating pressure range	0 ~ 8 kgf/cm ²	
Proof pressure	9.9 kgf/cm ²	
Ambient temperature	-10°C ~ 60°C	
Duty cycle	100% ED	
Coil type	DIN	
Protection class	IP65 (DIN 40 050)	
Insulation class	F	
Voltage tolerance	± 10%	
Standard voltage	12VDC, 24VDC	
Net weight	180g	160g

■ Dimensions

E-PU320-(01,02)-S

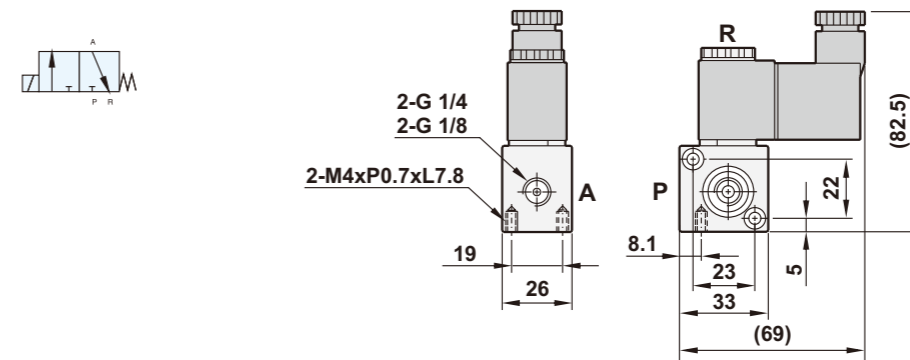


E-PU320N-(01,02)-S

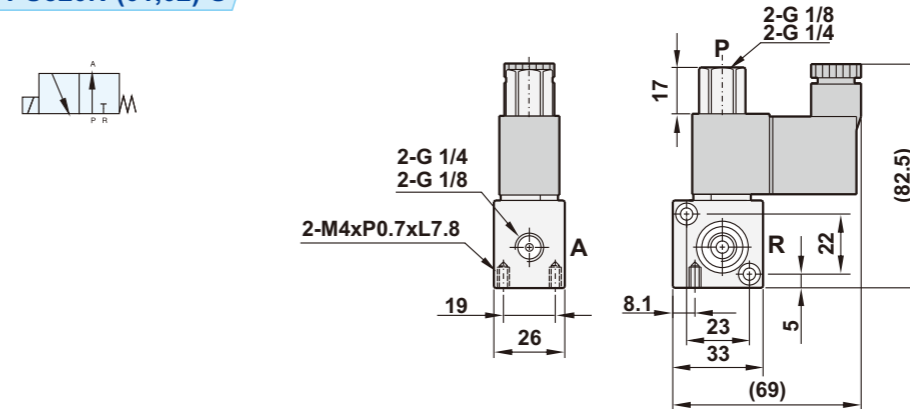

■ How to stack valve

E-PU320Mxx

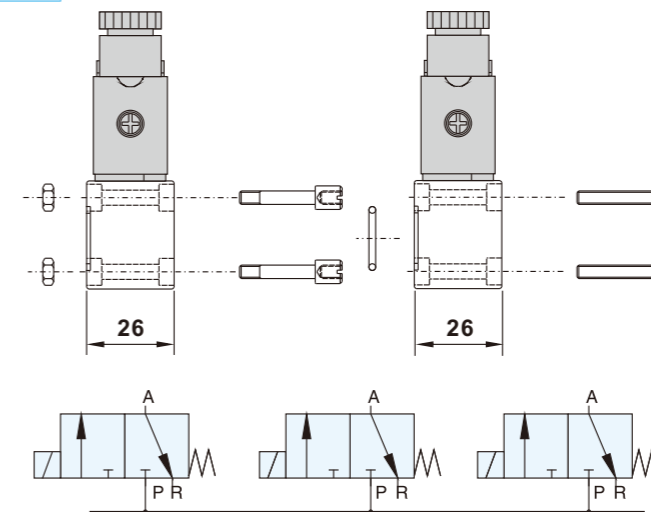

Mounting kit includes

Description	Qty.
O-ring	1
Bolts	2
Screws	2
Hex nuts	2