

Features

- * Pilot acting for low starting pressure.
- * Large flow rate and high working pressure.
- * Quick response.
- * Stainless steel body and stem provide exceptional durability.
- * Flange type is available for JIS 10K, ANSI 150LB and PN16.
- * Ex-proof coil T4 as optional accessory.
- * Timer for setting on/off time as optional accessory.
- * CE and EX-proof certified for all series.
- * Coil nut is available, please refer to page 7-6.



How to order

SPU225	A	N	E	F	-03	N	-S	1	LED	E
Stainless steel 2/2 way pilot acting	Series	Acting style	Diaphragm	Flange type	Port size	Thread	Solenoid	Voltage	LED	Ex-proof coil
A	Standard	Blank Normally closed N Normally open	Blank VITON B NBR E EPDM H HNBR	F 10K F3 150LB F4 PN16	03 3/8" 04 1/2" 06 3/4" 08 1" 12 1-1/4" 14 1-1/2" 20 2"	Blank G N NPT R Rc		1 110VAC 2 220VAC 9 24VDC	Blank W/O LED	

*Customized valve for water-hammer proof is available, please contact our sales for more details.

Specifications

Model	SPU225A-03	SPU225A-04	SPU225A-06	SPU225A-08	SPU225A-12	SPU225A-14	SPU225A-20
Port size	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Fluid	Compressed air (light oil, water)						
A series orifice	13mm	25mm	38mm	50mm			
Sectional area	88mm ²	230mm ²	404mm ²	552mm ²	883mm ²		
Acting	Pilot acting						
Diaphragm	VITON (Standard), NBR, EPDM (Option)						
Operating pressure range	0.5 ~ 10 kgf/cm ²						
Proof pressure	15 kgf/cm ²						
Body /Flange material	Stainless steel SUS316 / SUS304, SUS316						
Fluid temperature	-10℃ ~ 90℃						
Ambient temperature	-10℃ ~ 60℃						
Installation	Horizontal						
Duty cycle	100% ED						
Coil type	DIN						
Protection class	IP65 (DIN 40 050)						
Insulation class	F						
Voltage tolerance	± 10%						
Standard voltage	220VAC, 110VAC, 24VDC The other voltage is optional						
Power consumption	Normally closed AC110V:17.6VA, AC220V:18.1VA, DC: 15W : Normally open AC: 17.8VA, DC: 15W						
Net weight	775g	1550g	2820g	4665g			


Seal material selection guide

Seal	Temperature range	Suitable fluid	Unsuitable fluid
NBR	-15℃ ~ 80℃	Air, Water, Neutral gases, Mineral oil	Fuel oil, Gasoline and Hi-test gasoline, Diesel fuel
HNBR	-40℃ ~ 150℃	Air, Water, Gear oil, Engine oil	Pharmaceutical liquid, Gasoline and Hi-test gasoline, Light oil
VITON	-10℃ ~ 180℃	Fuel oil, Gasoline and Hi-test gasoline, Diesel fuel	Hot water, Steam, Brake oil (ATE Blue)
EPDM	-5℃ ~ 130℃	Hot water, Detergent liquid	Mineral oil, Gasoline

Dimensions




SPU225A Standard type

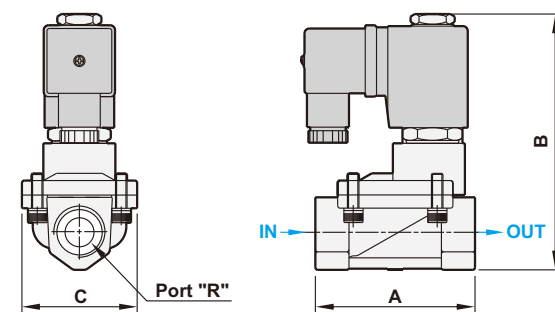


Model	SPU225A-03	SPU225A-04	SPU225A-06	SPU225A-08	SPU225A-12	SPU225A-14	SPU225A-20
R	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	66.5	66.5	99.0	99.0	131.5	131.5	160.0
B	106.5	106.5	126.5	126.5	145.5	145.5	160.5
C	48.0	48.0	70.0	70.0	96.0	96.0	112.0

SPU225A Flange type (10K)

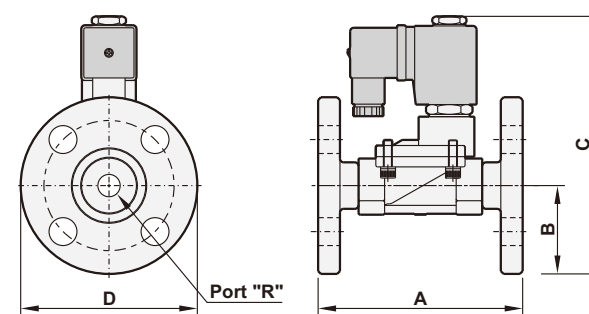

Model	SPU225AF-03	SPU225AF-04	SPU225AF-06	SPU225AF-08	SPU225AF-12	SPU225AF-14	SPU225AF-20
R	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	110.0	110.0	149.0	150.0	180.0	180.0	210.0
B	45.0	47.5	50.0	62.5	67.5	70.0	77.5
C	137.0	139.5	152.5	164.0	173.0	182.5	210.0
D	90.0	95.0	100.0	125.0	135.0	140.0	155.0

Explosion

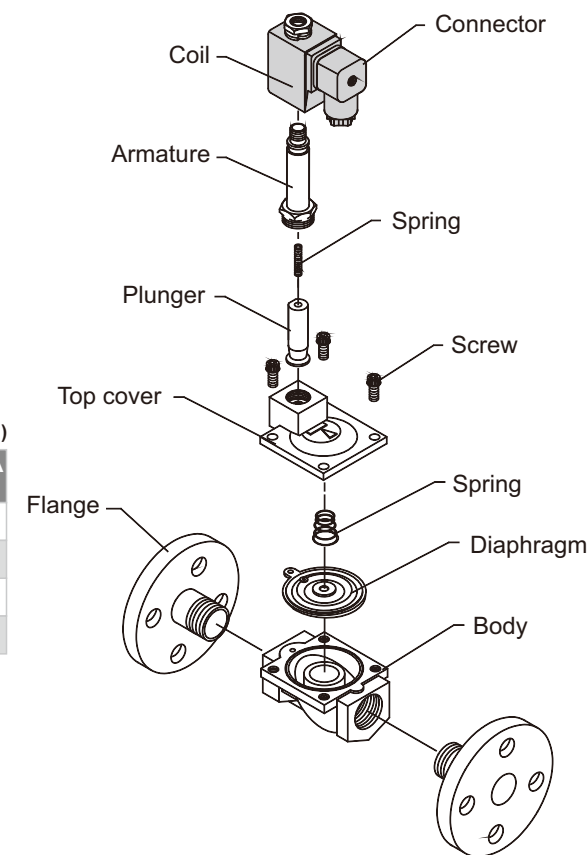

Flow chart

