

Features

- * To be installed in moving devices like air cylinder, slide...etc.
- * Various operating styles.
- * Panel bore size $\phi 30$ (Option $\phi 25$).



How to order

MSV8652

02

N

R

G

Mechanical valves

Port size

Thread

Operator

Operator color

52 5/2 Way

01 1/8"
02 1/4"

Blank G
N NPT
R Rc

Operator	
R	Roller
TB	Twist selector
LB	Long twist selector
PB	Palm button (Mushroom)
PP	Palm button (Flush)
PPL	Palm button (Extended)
EB	Stop cock button
PH	Push-pull button


Operator color	
Blank	Standard color
G	Green
B	Black
Y	Yellow

Specifications

Model	MSV8652-01	MSV8652-02
Port size	1/8"	1/4"
Body material	Aluminum alloy	
Panel dimension	30mm (Option:25mm)	
Fluid	Compressed air	
Sectional area	14mm ²	18mm ²
Operating pressure range	0 ~ 9 kgf/cm ²	
Proof pressure	10 kgf/cm ²	
Ambient temperature	-10°C ~ 60°C	
Standard operator color	Black: TB, LB; Red: PB, PP, PPL, EB	
Optional color	Green, Black, Yellow for PB, PP, PPL	


Dimensions

MSV8652-01, 02

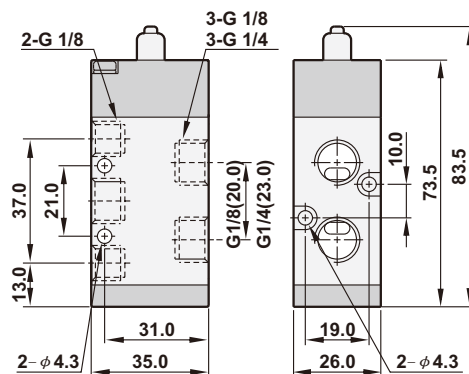


Dimensions


LB

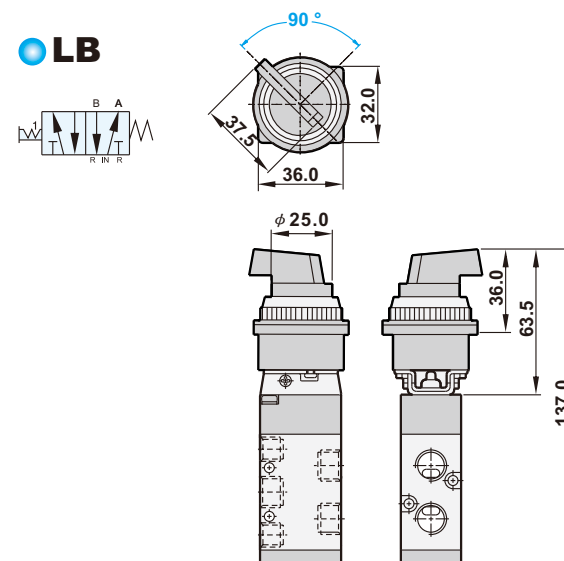


EB

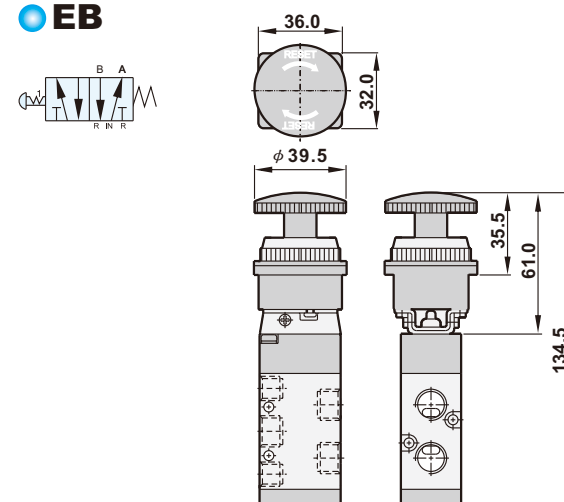


TB

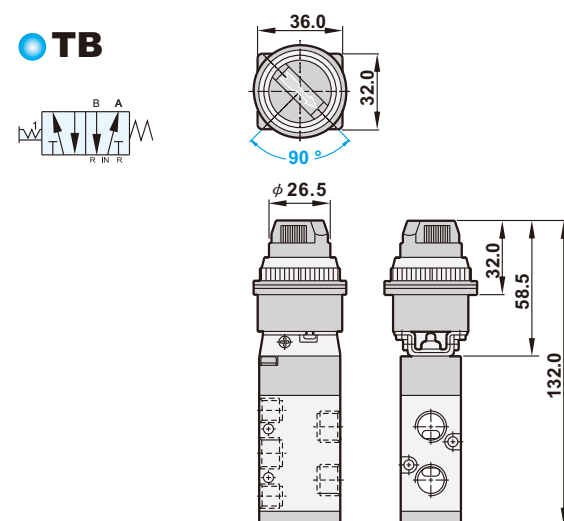


PB

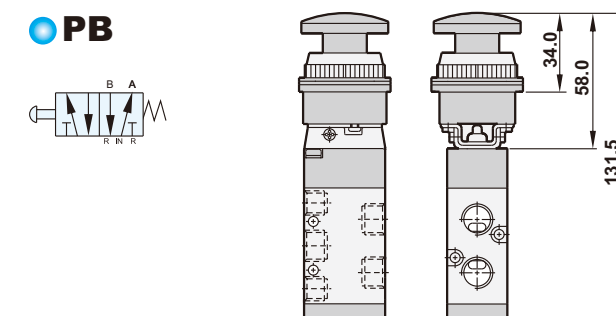


PP

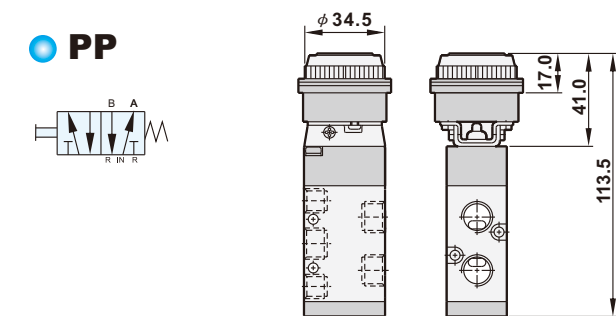

PPL

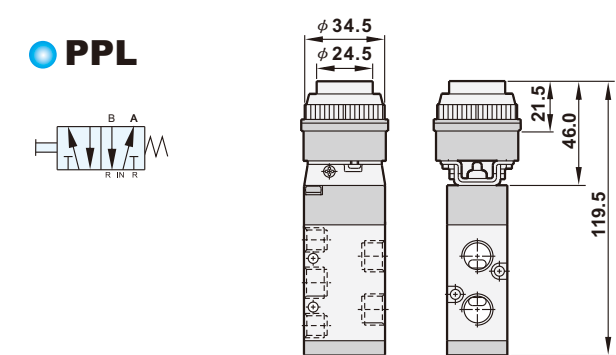

PH

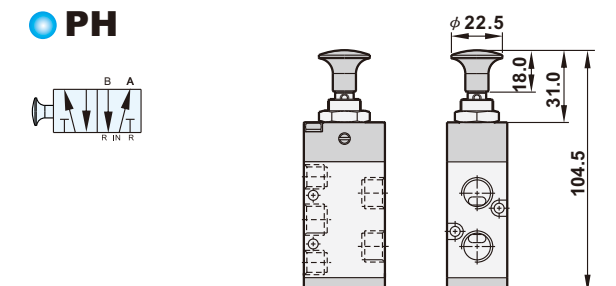

R

