

Features

- * Suitable for flammable working environments.
- * The valve is actuated by air for accurate response.



How to order

SA520

SA pneumatic valves series

52	5/2 way
53	5/3 way valve is only available for double pneumatic control

X

Acting style

Blank	Standard
X	Exhaust center
Y	Pressurized center

01

Port size

01 1/8"

N

Thread

Blank	G
N	NPT
R	Rc


S

Pneumatic control


S	Single pneumatic
D	Double pneumatic

Flow chart


Model: SA520-01S

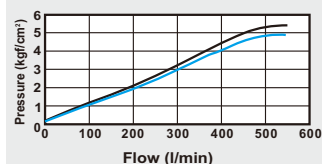

Model: SA520-01D

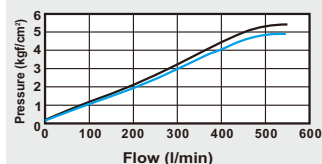

Model: SA530-01D

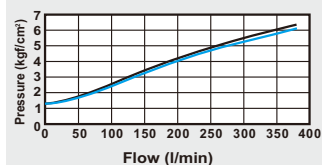


Specifications


Model	SA520-01S	SA520-01D	SA530-01D
Port size	1/8"		
Body material	Aluminum alloy		
Effective area	11mm ²		9mm ²
Fluid	Compressed air		
Acting	External pilot (1.5 ~ 7 kgf/cm ²)		
Operating pressure range	0 ~ 8 kgf/cm ²		
Proof pressure	9.99 kgf/cm ²		
Ambient temperature	-10℃ ~ 80℃		
Net weight	70g	75g	110g

Dimensions

SA520-01S

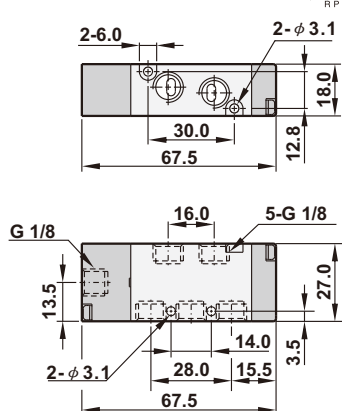

SA520-01D

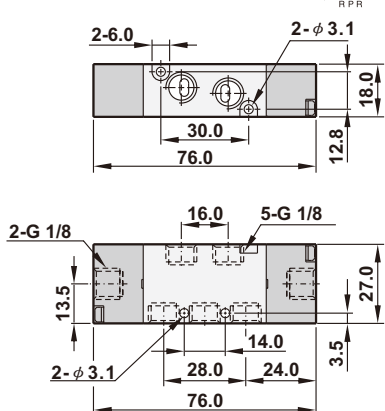

SA530(X)(Y)-01D

