




How to order

EN	—	01	Silencer-plastic type		Port size
			01 : 1/8"	04 : 1/2"	
			02 : 1/4"	06 : 3/4"	
			03 : 3/8"	08 : 1"	


Dimensions

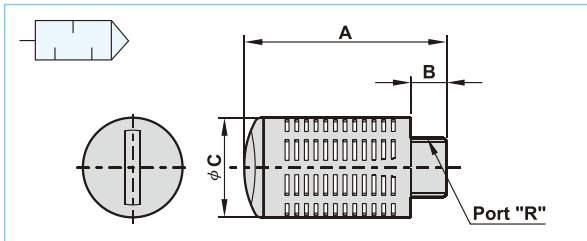

How to order

ENB	—	01	Silencer-plastic type		Port size
			01 : 1/8"	03 : 3/8"	
			02 : 1/4"	04 : 1/2"	


Dimensions

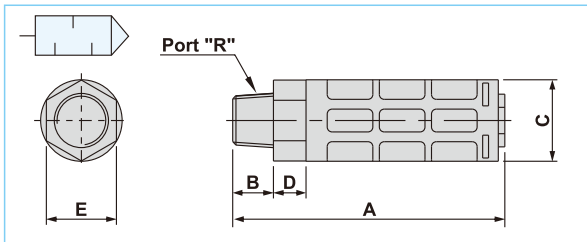


How to order

EV	—	01	N	Silencer-vibration type		Port size	Thread
						01 : 1/8"	Blank : PT
						02 : 1/4"	N : NPT
						03 : 3/8"	
						04 : 1/2"	

Dimensions

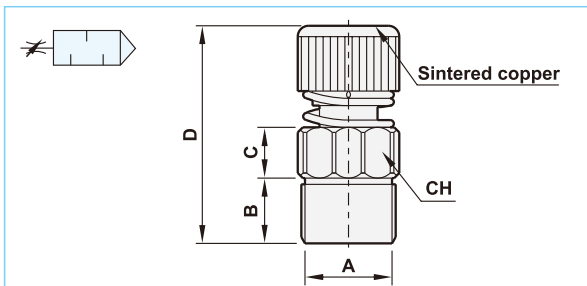

Dimensions




How to order

ES	—	01	N	Silencer-exhaust speed control type		Port size	Thread
						01 : 1/8"	Blank : PT
						02 : 1/4"	N : NPT
						03 : 3/8"	
						04 : 1/2"	

Model	R	B	C	D	E	CH
ES-01	PT 1/8"	6	7	23	36	12
ES-02	PT 1/4"	9	7	28	43	14
ES-03	PT 3/8"	10	10	35	46.5	18
ES-04	PT 1/2"	11	5	20	56.5	22

Dimensions

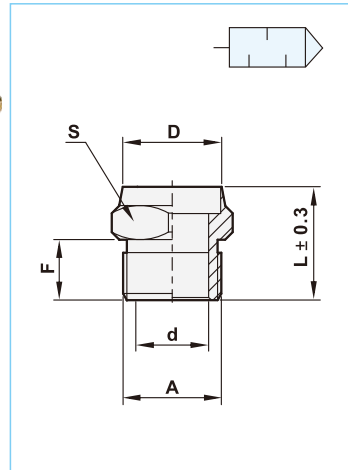

How to order

EP	—	01	N	Silencer-breather vents type		Port size	Thread
						M5 : M5	Blank : PT
						01 : 1/8"	N : NPT
						02 : 1/4"	
						03 : 3/8"	
						04 : 1/2"	
						06 : 3/4"	
						08 : 1"	

Model	A	D	d	L	F	S
EP-M5	M5	7.5	2.5	10	5	8
EP-01	PT 1/8"	11.4	6.5	11.3	6.4	12
EP-02	PT 1/4"	14.8	9	14.1	8.2	15
EP-03	PT 3/8"	18	12	15.8	9	19
EP-04	PT 1/2"	21	15	18.8	10.5	22
EP-06	PT 3/4"	26	20	20.8	12	27
EP-08	PT 1"	34.2	26	24.8	14.5	36

How to order

EC	—	01	N	Silencer-muffler type		Port size	Thread
						M5 : M5	Blank : PT
						01 : 1/8"	N : NPT
						02 : 1/4"	
						03 : 3/8"	
						04 : 1/2"	
						06 : 3/4"	
						08 : 1"	

Model	A	B	C	D	F	L	S
EC-M5	M5	3	12	4	5	20	8
EC-01	PT 1/8"	4	14	7	6	24	12
EC-02	PT 1/4"	4	18	10	8	30	16
EC-03	PT 3/8"	5	21	11	9	35	18
EC-04	PT 1/2"	6	28	15	10	44	24
EC-06	PT 3/4"	8	32	20	10	50	30
EC-08	PT 1"	8	43	25	12	63	36